
CERFIX PROTRIM IP

External corners profiles



DESCRIPTION

Cerfix Protrim IP is a range of profiles particularly suitable for finishing and protecting the external corners of ceramic tile coverings. Its shape provide a minimalist finish to the edge. These profiles require the tile edges to be cut at a 45° angle.
The stainless steel version is particularly resistant to chemical agents, atmospheric conditions, and mechanical stress.
It is therefore also particularly suitable for finishing and protecting stair edges in a wide variety of materials such as ceramic, stone, or other materials.
Cerfix Protrim IP in stainless steel can also be used as finishing profiles for worktops and platforms.
Anodised and bright aluminium models are not recommended for outdoor use.
Polished and colour-coated aluminium models are not recommended for floor application.

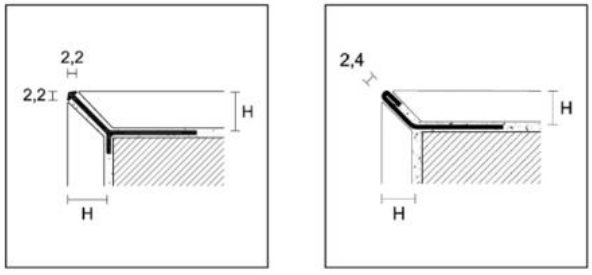

IPA/ IPB/ IPV/ IPI/

FEATURES AND BENEFITS

- Profile with modern and minimalist design
- It protects the corners of ceramic coverings
- For tile edges that need the 45° cut
- Available in aluminium and steel
- The twenty Trend Colour finishes perfectly match the trendiest colours in the world of interior design and ceramic tiles

MATERIALS

Anodised aluminium
Bright aluminium
Colour - coated aluminium
Stainless steel - AISI 304 - DIN 1.4301

For further information, please refer to the section “MATERIALS AND CHARACTERISTICS” at the end of the current Price List Catalogue.

INSTALLATION

Installation with adhesive
Use appropriate personal protective equipment (PPE), such as cut-resistant gloves, when handling the profile.
Remove the profile from its packaging.
Check that the thickness of the wall or floor covering to be installed does not exceed the height of the selected profile.
Where present, remove the protective and/or heat-shrink film used to protect the product finish.
Measure the length of the perimeter to be protected and pre-cut the profiles to size.
Apply the selected adhesive to the installation surface using a notched trowel and place the profile, aligning it flush with the already installed covering.
Install the remaining covering, ensuring it is flush with the profile and spaced at the appropriate distance to maintain the grout joint (usually between 1 and 2 millimetres).
Fill the joint between the covering and the profile with a suitable sealant.
Carefully clean the grout or any other installation residues using a soft sponge and water within 10 minutes of application.

CARE AND MAINTENANCE

The care and maintenance of the materials used for the manufacture of these profiles are closely related to the type of alloy and/or finish employed.
The following guidelines describe the operations required to restore the profile, as much as possible, to its original appearance.
These instructions are intended to provide general guidance on the timing and methods for cleaning; however, they must be assessed on a case-by-case basis.
It should be noted that specific responsibilities apply at every stage of the product's life cycle, starting from installation.


Aluminium
Aluminium does not require specific maintenance and can be easily cleaned using colourless alcohol diluted with water or neutral detergents diluted with water (e.g. products from the MAPEI ULTRACARE range). Do not use acidic or alkaline detergents.
Rinsing must be carried out using water only, with non-abrasive sponges and/or cloths to avoid scratching and/or damaging the finish.
No maintenance with polishing products or similar substances is required.
Cement, adhesive and grouting materials must be promptly and carefully removed from the visible surface of the profile.

Stainless steel
Stainless steel does not require specific maintenance and can be easily cleaned using hot water and soap or neutral detergents diluted with water (e.g. products from the MAPEI ULTRACARE range). Do not use acidic detergents.
Rinsing must be carried out using water only, with non-abrasive sponges and/or cloths to avoid scratching and/or damaging the finish.
In the case of surfaces exposed to atmospheric or aggressive agents, periodic cleaning of the stainless steel profile is recommended in order to preserve the surface appearance and prevent the onset of corrosion.
For profiles with a brushed finish, always clean in the direction of the brushing and never across it.
Avoid leaving objects or tools made of common steel (such as brushes or steel wool) in prolonged contact with stainless steel profiles, as contamination with ferrous particles may cause rust stains on the surface.
Avoid leaving damp cloths or sponges in prolonged contact with stainless steel to prevent the formation of unsightly stains.
In the event of scratches, use a specific cleaner/polish for stainless steel, applying it with a soft cloth.
For maintenance, use commonly available polishing products.

FIRE PREVENTION MEASURES

In the event of fire, use chemical fire extinguishers, dry sand or solid extinguishing agents.

PROFILES FOR EXTERNAL CORNERS



IPA/
IPB/
IPV/

PROTRIM IP

length = 270 cm - pack 20 pcs			H			
ART.	**finishing**		**4,5**	**8**	**11**	**15**
ALUMINIUM						
IPA/	silver anodised		95006	95178	95181	95185
IPB/	bright polished silver		95008	-	-	-

individually packed

TREND COLOR


PROTRIM IP - TREND COLOR STONE

length = 270 cm - pack 20 pcs			H
ART.	**finishing**		**11**
COLOUR-COATED ALUMINIUM			
	TREND COLOR STONE		
	dark brown		95182
	anthracite grey		95183
	ancient grey		95184
	grey		95186
	rust		95187
	bronze		95188
	stone		95189
	greige		95190
	sand		95191
	beige		95192
IPV/	white stone		95193
	black stone		95194
	TREND COLOR CONCRETE		
	concrete white		95195
	concrete graphite		95196
	concrete smoke		95197
	concrete mud		95198
	concrete sand		95199
	solid white		95205
	TREND COLOR METAL		
	metal dark		95206
	metal light		95217

individually packed - Other heights with TREND COLOR finishes are available upon request, with a minimum of 270 meters.



IPV/11 beige colour-coated aluminium



IPI/

PROTRIM IP

length = 270 cm - pack 20 pcs			H			
ART.	**finishing**		**7**	**8**	**11**	**12,5**
STAINLESS STEEL						
IPI/	stainless steel AISI 304 - DIN 1.4301		95169	95170	95173	95174

individually packed

WARNING

Although the technical details and recommendations contained in this product data sheet correspond to the best of our knowledge and experience, all the above information must, in every case, be taken as merely indicative and subject to confirmation after long-term practical application; for this reason, anyone who intends to use the product must ensure beforehand that it is suitable for the envisaged application. In every case, the user alone is fully responsible for any consequences deriving from the use of the product.

Please refer to the current version of the Technical Data Sheet, available from our website profilpas.com

PRODUCT FOR PROFESSIONAL USE

LEGAL NOTICE

The contents of this Technical Data Sheet ("TDS") may be copied into another project-related document, but the resulting document shall not supplement or replace requirements per the TDS in force at the time of the PROFILPAS product installation.

The most up-to-date TDS can be downloaded from our website profilpas.com

ANY ALTERATION TO THE WORDING OR REQUIREMENTS CONTAINED OR DERIVED FROM THIS TDS EXCLUDES THE RESPONSIBILITY OF PROFILPAS.

PRESCRIPTION

Supply and installation of a (...) profile (type CERFIX PROTRIM IP by Profilpas S.p.A.) with a minimal section, designed to act as an edge protection profile serving both as a finishing and protective solution for the external corners of ceramic tile coverings where a 45° cut is required at the edge of the tiles.
The profile shall have a height of (...) mm and a length of 270 cm. Thanks to its dimensions, the profile may be installed without joints in a single continuous length, embedding the perforated lateral anchoring flange into the suitable adhesive selected for the installation of the ceramic flooring (e.g. products by Mapei S.p.A.).
During installation, the joint formed between the tile and the profile must be filled with a suitable sealant (e.g. products by Mapei S.p.A.). Any residues of adhesive, grout or sealant present on the profile must be removed immediately using non-abrasive tools. Upon completion of installation, any residual cementitious or epoxy materials may be removed using a suitable cleaning product (e.g. products from the MAPEI ULTRACARE range).

Profilpas S.p.A.

Via Albert Einstein, 38, 35010 Cadoneghe (Padova)

+39 049 8878411 www.profilpas.com info@profilpas.com

13329-06-2026-en

Any reproduction of texts, photos and illustrations published here is prohibited and subject to prosecution.