
MAGNETIC KIT K10

Accessories for installation

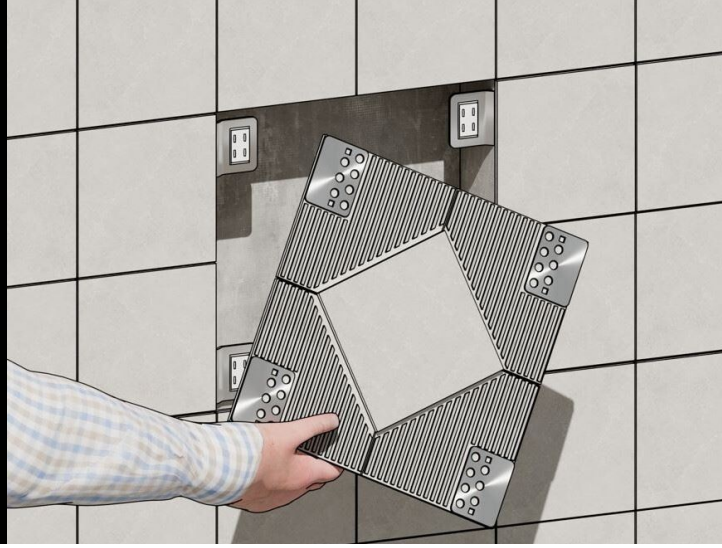

DESCRIPTION

K10 is a magnetic system comprising magnetic catches and perforated counterplates designed for the creation of removable inspection panels within ceramic tile coverings.
The system enables the creation of discreet and easily accessible openings for technical compartments and service installations, preserving the visual continuity of the tiled surface while ensuring convenient access for maintenance operations.
K10 is the ideal solution for creating removable panels for plumbing manifolds, junction boxes, water distribution units, technical niches and other installations requiring periodic inspections or maintenance work.
Thanks to the magnetic fixing system, the panel can be easily removed and repositioned. Opening by means of a standard suction cup allows quick and convenient access to the technical compartment without affecting the continuity of the tiled finish.
The kit is designed for inspection panels with a maximum weight of 2.5 kg.
Each package contains 4 magnetic catches and 4 perforated striker plates.
For panels weighing more than 2.5 kg, it is recommended to increase the number of magnetic fixing points proportionally by using additional kits, verifying their suitability according to the panel's size and weight.

FEATURES AND BENEFITS


- Simple and quick installation of removable inspection panels
- Convenient access to service installations and technical compartments without demolition work
- Perfect integration with the wall surrounding

INSTALLATION

Installation with adhesive

1. Prepare the inspection opening by creating an aperture sized to accommodate the removable panel, including the space required for grout joints. Then fix the magnetic catches around the perimeter of the opening onto the tile backing substrate by bonding them into place, ensuring that the magnets are correctly oriented towards the panel to be supported.
2. Create the removable panel using one or more tiles according to the dimensions of the inspection opening. Apply a suitably sized reinforcement element to the rear side of the panel and secure the counterplates. Fix the counterplates to the rear of the panel in correspondence with the magnetic catches and complete the tile installation, ensuring proper alignment of the grout joints with those of the surrounding tiled surface.
3. Place the panel into the opening, checking the correct engagement between the magnetic catches and the counterplates, the stability of the system and the seamless integration with the surrounding tiled finish.

To ensure proper alignment of the panel with the surrounding tiled surface, it is recommended to verify material thicknesses, dimensional tolerances and the position of the magnetic catches before installation.
Minor adjustments to panel flatness may be achieved by carefully bending the metal support brackets. In such cases, the magnetic catches and corresponding counterplates should remain as parallel as possible in order to maintain optimal magnetic performance and panel stability.

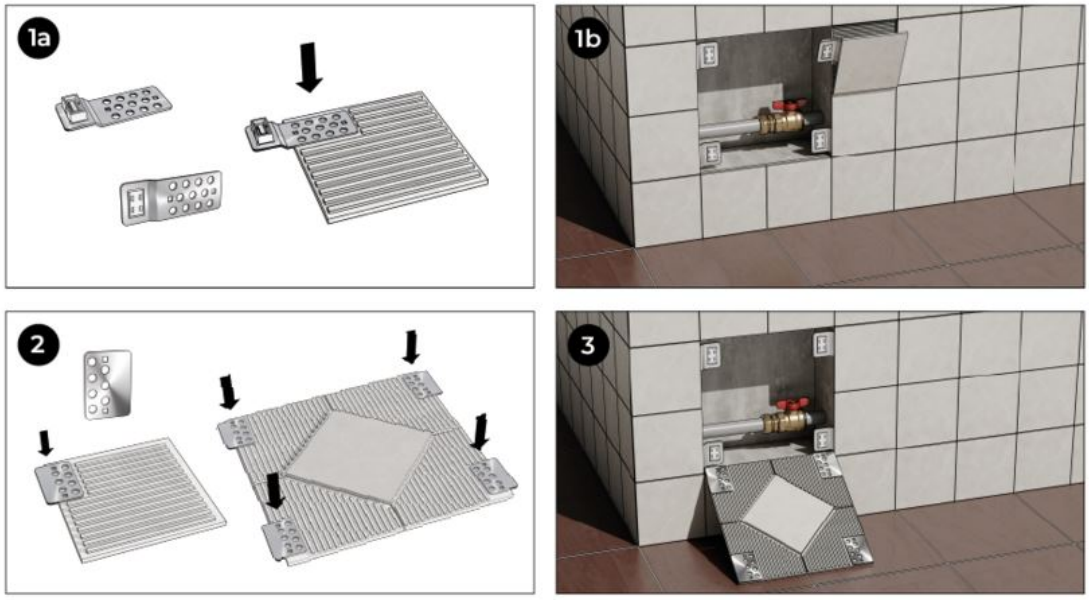


CARE AND MAINTENANCE

The K10 Magnetic Kit requires no special maintenance.
It is recommended to keep the contact surfaces of the magnetic components clean and to verify the correct positioning of the removable panel during inspection operations.
For cleaning accessible parts, use only neutral detergents and soft cloths. Avoid aggressive, abrasive or acidic cleaning agents that may affect the appearance of the metal components.
Any adhesive, grout or installation material residues should be removed promptly during installation.

FIRE PREVENTION MEASURES

In the event of fire, use chemical fire extinguishers, dry sand or solid extinguishing agents.

ACCESSORIES FOR INSTALLATION

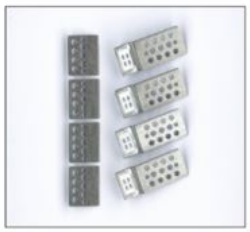

MAGNETIC KIT	
box with 10 blisters	
K10	00410

WARNING

Although the technical details and recommendations contained in this product data sheet correspond to the best of our knowledge and experience, all the above information must, in every case, be taken as merely indicative and subject to confirmation after long-term practical application; for this reason, anyone who intends to use the product must ensure beforehand that it is suitable for the envisaged application. In every case, the user alone is fully responsible for any consequences deriving from the use of the product.

Please refer to the current version of the Technical Data Sheet, available from our website profilpas.com

PRODUCT FOR PROFESSIONAL USE

LEGAL NOTICE

The contents of this Technical Data Sheet ("TDS") may be copied into another project-related document, but the resulting document shall not supplement or replace requirements per the TDS in force at the time of the PROFILPAS product installation.

The most up-to-date TDS can be downloaded from our website profilpas.com

ANY ALTERATION TO THE WORDING OR REQUIREMENTS CONTAINED OR DERIVED FROM THIS TDS EXCLUDES THE RESPONSIBILITY OF PROFILPAS.

PRESCRIPTION

Supply and installation of a magnetic kit for the creation of removable concealed inspection panels, such as K10 by Profilpas S.p.A., consisting of 4 magnetic catches and 4 perforated counterplates for the creation of accessible openings to technical compartments and service installations, to be installed in accordance with the manufacturer's instructions.

Profilpas S.p.A.

Via Albert Einstein, 38, 35010 Cadoneghe (Padova)

+39 049 8878411 www.profilpas.com info@profilpas.com

13432-09-2026-en

Any reproduction of texts, photos and illustrations published here is prohibited and subject to prosecution.